


4


3

2

1

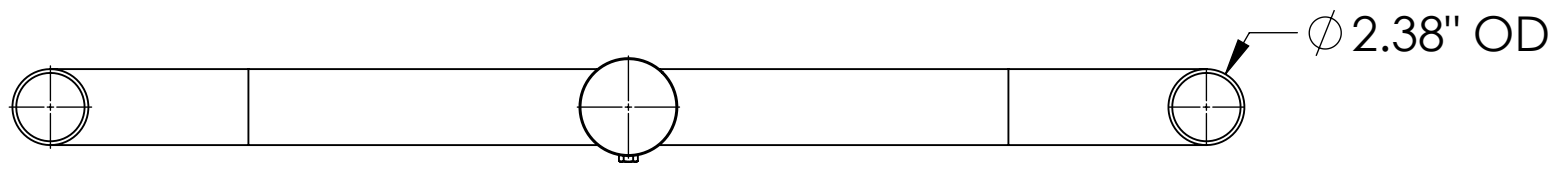


Ø 2.38" OD

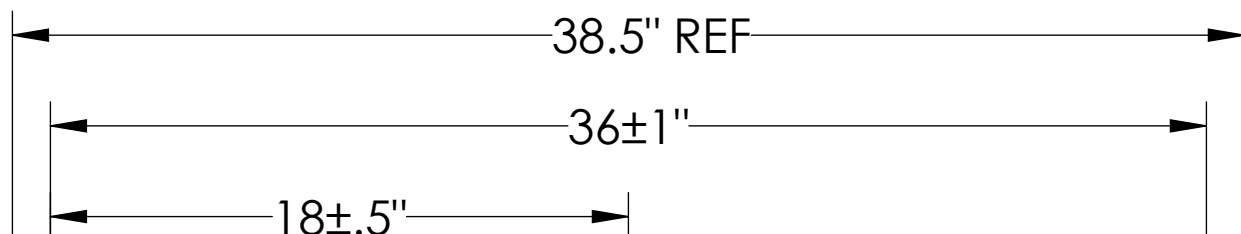

38.5" REF

36 ± 1"

18 ± 0.5"

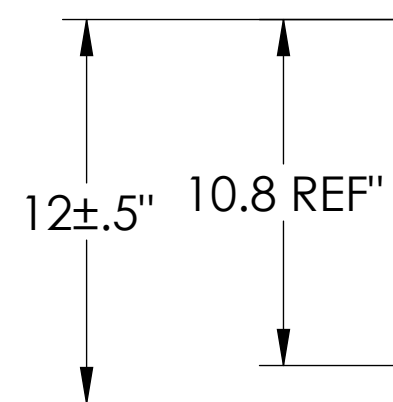


12 ± 0.5"

10.8 REF"

R6.19 REF

3" Standard Round Pole Cap



4.5"


7.0"

1.0"

Hex Head Screw Black Coated
M8 x 1.25 Thread, 25mm
3 Places 120° Apart




Ø 3.00" OD
Ø 2.76" ID

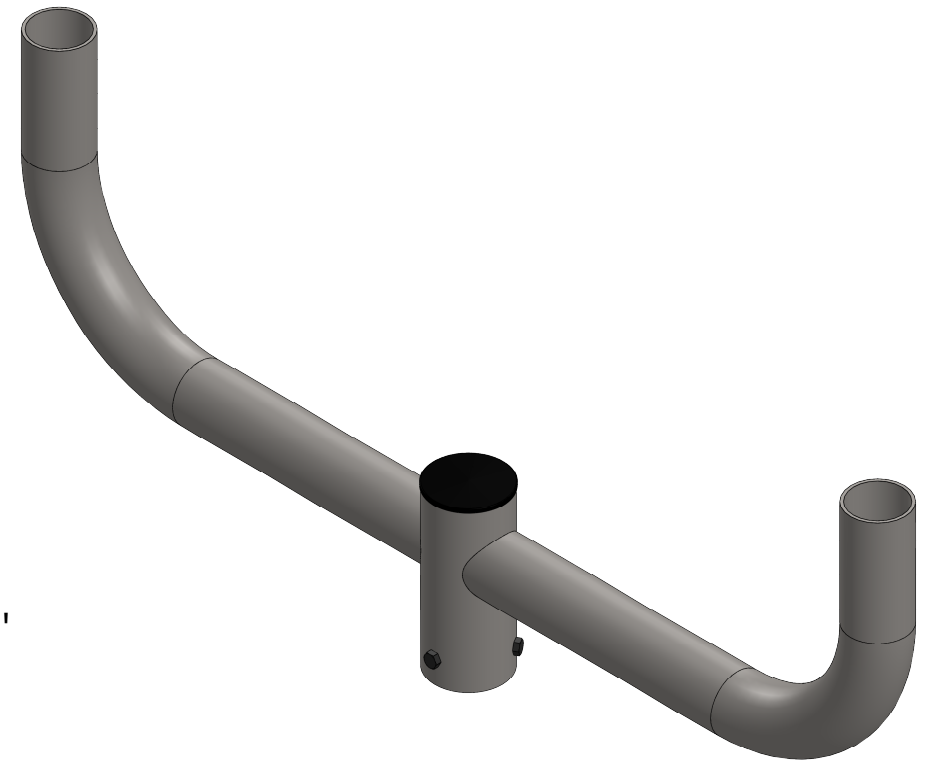

All dimensions and specifications are subject to change without any notice.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF **Energy Light LLC**. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF **Energy Light LLC** IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE:		
		DIMENSIONS ARE IN INCHES		DRAWN	MKA	Steel bullhorn with 2 Arms at 180°		
		TOLERANCES:		ENG APPR.				
		FRACTIONAL ± 1/64		MFG APPR.				
		ANGULAR: ± 0.5°		Q.A.				
		TWO PLACE DECIMAL ±0.01				SIZE	ITEM NO.	
		THREE PLACE DECIMAL ±0.005				B	10066	
		INTERPRET GEOMETRIC TOLERANCING PER:				SCALE: 1:6	WEIGHT: 14 Lbs	
		MATERIAL				REV		
		STEEL						
NEXT ASSY	USED ON	FINISH						
APPLICATION		DO NOT SCALE DRAWING						

4

3

2

1

B

B

A

A